

Universal controller with double reading



Single-channel universal regulator with elements fuzzy logic PID



- microprocessor controller for temperature and other physical quantities (humidity, pressure, level, speed, etc.) converted into a standard electrical signal ($0/4\div 20\text{mA}$, $0\div 10\text{V}$, $0\div 60\text{mV}$, $0\div 2,5\text{k}\Omega$)
- 1 universal input (thermometer, thermocouple and analogue)
- BIN programmable digital input for changing operational mode of the controller: controller start/stop, manual/automatic mode for outputs, two-position switching of the set value (day/night), keyboard lock
- 2 outputs of ON/OFF type with the following characteristics:
 - output 1 (main): ON-OFF with hysteresis, PID, fuzzy logic (auto-tuning) PID
 - output 2 (auxiliary/alarm): ON-OFF with hysteresis
- analogue output $0/4\div 20\text{mA}$ or $0/2\div 10\text{V}$ (constant-control, retransmission)
- advanced function of selecting PID parameters with fuzzy logic elements
- available for binary and analogue outputs, for setting the value of the output signal in the range of $0\div 100\%$
- programmable operation characteristics (process controller, ramping)
- built-in 24 Vdc power supply for supplying on-site transducers
- two-line LED digital readout with adjustable brightness:
 - **Upper display** - measured value,
 - **Bottom display** - setpoint of output 1
- RS485 serial interface, galvanically isolated, MODBUS-RTU
- compensation of line resistance for resistance sensors
- temperature compensation of thermocouple cold ends
- programmable input, range of indications (for analogue inputs), options for adjustment, alarms, communication, access and other configuration parameters
- access to configuration parameters is protected by the user's password
- methods for configuring parameters:
 - via membrane keyboard (IP65) located on the front panel of the device
 - via RS485 or PRG AR955/GP programmer and firmware: ARsoft-LOG (Windows 7/8/10)
- software and programmer allow you to view the measured value and quickly configure single or few sets of parameters previously saved in the computer for re-use, e.g. in other controllers of the same type (duplicate configuration)
- ingress protection rating: IP65 from the front
- high accuracy, long-term stability and immunity to interference
- optional to choose (in the ordering method): power supply 24Vac/dc, output SSR, analog output $0/2\div 10\text{V}$, digital input BIN and interface RS485

Contents of set:


- regulator with handles mounting in the window
- user manual
- warranty card

Available accessories:

- programmer AR955/GP (with optional adapter)
- RS485 to USB converter

DIMENSIONS, INSTALLATION DATA



Enclosure dimensions	48x48x79 mm
Panel window	46x46 mm
Fixing methods	panel, grips on the side of the enclosure
Material	self-extinguishing polycarbonate NORYL 94V-0
Leads cross sections	2,5mm ² (power i outputs 1,2), 1,5mm ² (remaining)

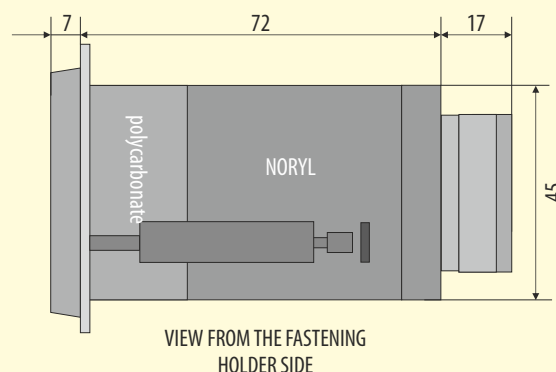

TERMINAL STRIPS, ELECTRICAL CONNECTIONS



PRG socket is accessible from top of the enclosure

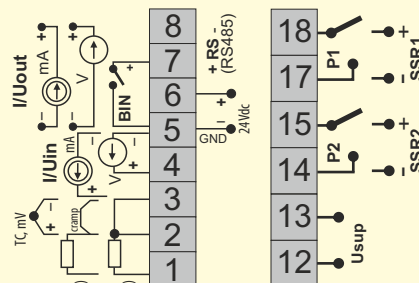

How to order

AR602 / □ / □ / □ / □

Supply	Code	Outputs 1, 2	code	Additional option *	Code
230 Vac	S1	relay	P	output 0/4÷20mA	WA
24 Vac/dc	S2	SSR	S	output 0/2÷10 V	WU
				interface RS485**	RS485

*available is just one additional option:
output 0/4÷20 mA, output 0/2÷10 V or interface RS485
interface RS485 excludes additional binary input BIN
** option for an extra fee

For examples:

AR602 / S1 / S / P / RS485

AR602, supply 230 Vac, main output (1) SSR, auxiliary output(2) relays, interface RS485 (instead analog output and binary input)

Technical Data

Universal inputs (programmable)		measurement ranges
- Pt100 (RTD, 3- or 2-wire)		-200 ÷ 850 °C
- Ni100 (RTD, 3- or 2-wire)		-50 ÷ 170 °C
- Pt500 (RTD, 3- or 2-wire)		-200 ÷ 620 °C
- Pt1000 (RTD, 3- or 2-wire)		-200 ÷ 520 °C
- thermocouple J (TC, Fe-CuNi)		-40 ÷ 800 °C
- thermocouple K (TC, NiCr-NiAl)		-40 ÷ 1200 °C
- thermocouple S (TC, PtRh 10-Pt)		-40 ÷ 1600 °C
- thermocouple B (TC, PtRh30PtRh6)		300 ÷ 1800 °C
- thermocouple R (TC, PtRh13-Pt)		-40 ÷ 1600 °C
- thermocouple T (TC, Cu-CuNi)		-25 ÷ 350 °C
- thermocouple E (TC, NiCr-CuNi)		-25 ÷ 820 °C
- thermocouple N (TC, NiCrSi-NiSi)		-35 ÷ 1300 °C
- current ($R_{me} = 50 \Omega$)		0/4 ÷ 20 mA
- voltage ($R_{me} = 110 k\Omega$)		0 ÷ 10 V
- voltage ($R_{me} > 2 M\Omega$)		0 ÷ 60 mV
- resistance (3- or 2-wire)		0 ÷ 2500 Ω
Number of measurement inputs		1
Response time for measurements (10 ÷ 90%)		0,25 ÷ 3 s (programmable)
Resistance of leads (RTD, Ω)		$R_L < 25 \Omega$ (for each line)
Resistance current (RTD, Ω)		400 μA (Pt100, Ni100), 200 μA (remaning)
Processing errors (at 25°C ambient temperature):		
- basic	- for RTD, mA, V, mV, Ω	0,1 % of measuring range ± 1 digit
	- for thermocouples	0,2 % of measuring range ± 1 digit
- additional for thermocouples		<2 °C (cold ends temperature)
- additional caused by ambient temperature changes		< 0,003 % of input range /°C
Resolution of measured temperature		0,1 °C or 1 °C, programmable
Binary inputs (contact or voltage <24V)		bistable, active level: short-circuit or < 0,8 V
Communication interface (RS485 i PRG, do not use at the same time)	- RS485 (galvanically separated), option	- bitrate 2,4 ÷ 115,2 kb/s, - format 8N1 (8 data bit, 1 bit stop, no parity bit), - MODBUS-RTU protocol (SLAVE)
	- PRG programming link (no separation), standard	
Outputs (2 relays or SSR)	- relay (P1, P2), standard	5A / 250Vac (for resistive loads), SPST-NO
	- SSR (SSR1, SSR2), option	transistor type NPN OC, 11V, internal resistance 440 Ω
Analogue outputs (1 current or voltage)	- current 0/4 ÷ 20 mA (standard)	maximum resolution 1,4 μA (14 bit)
		output load $R_o < 350 \Omega$
	- voltage 0/2 ÷ 10 V (option, instead 0/4 ÷ 20 mA)	maximum resolution 0,7 mV (14 bit)
	- output basic error	output load $I_o < 3,7 mA$ ($R_o > 2,7 k\Omega$)
7-segment LCD display with brightness control	- top	red 4 digits, height 9mm
	- bottom	green 4 digits, height 7 mm
Signalling	- relays active	LED's, red
	- messages and errors	LED display
Power supply (Usup)	- 230Vac (standard)	85 ÷ 260 Vac/ 3VA
	- 24Vac/dc (option)	20 ÷ 50 Vac/ 3VA, 20 ÷ 72 Vdc/ 3W
Power supply to filed transmitters		24Vdc / 30mA
Rated operating conditions		0 ÷ 50°C, <100 %RH (non-condensing)
Working environment		air and neutral gases
Protection rating		IP65 front, IP20 of the connections side
Weight		~135g
Electromagnetic compatibility (EMC)		- immunity: acc. to PN-EN 61000-6-2
		- emission: acc. to PN-EN 61000-6-4

Version 3.0.1 2013.03.19